



- 3 in 1: Special photoelectric reflex switch (FGS adjustable), valve and logic form a compact unit
- Very insensitive against mirroring, reflecting, shiny, depolarizing surfaces
- Integrated logic for accumulating roller conveyors



See chapter Accessories
Cables and connectors
Mounting systems
Reflectors

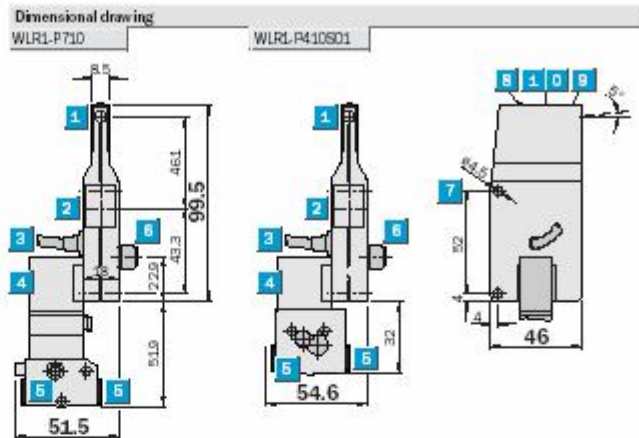


Adjustments possible
WLR1-P710



- 1 Centre of transmitter's optical axis
- 2 Centre of receiver's optical axis
- 3 Cable with receptacle, 4-pin
- 4 Solenoid valve
- 5 Media connector (2 x) ø 8 x 1
- 6 M12 plug, 4-pin
- 7 Mounting holes ø 4.5
- 8 Signal strength indicator
- 9 Sensitivity control

Connection type
WLR1-P710



4-pin, M12

