


0221562



- According to EC Directive for machines 98/37/EG
- According to EN 60204-1, DIN VDE 0113-1
- Safety category 4 according to DIN EN 954-1
- Output: max. 6 NO, 1 NC contacts or 1 NO contact for AC 250 V
- Optionally with release delayed NO contact to 10 min
- 1-channel or 2-channel connection
- Line fault detection at On pushbutton
- Optionally automatic On function after connection of operating voltage or activation via On pushbutton
- Optionally cross fault detection in emergency stop control circuit
- Optionally dual voltage version
- Feedback circuit X1-X2 for monitoring external contactors
- Integrated short-circuit and overvoltage protection
- Optionally with protective separation to VDE 0106 part 101
- LED displays for channels 1 and 2 and supply
- Removable terminal strips
- Wire connection: also 2 x 1,5 mm² stranded ferruled (isolated), DIN 46 228-4 or 2 x 2,5 mm² stranded ferruled DIN 46 228-1/-2/-3
- Width 100 mm

Function diagram

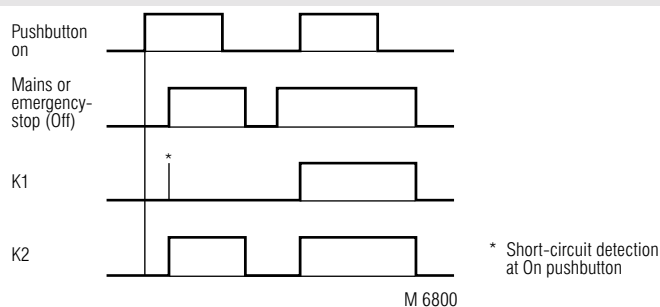

Approvals and marking



* see variants


Applications

- Protection of people and machines
- Emergency stop circuits on machines
- Monitoring of safety gates


Indication

- LED power supply: on, when operating voltage present
- LED K2: on, when supply on relay K2
- LED K3: on, when supply on relay K3
- only at BO 5988/4 ___,
BO 5988/5 ___,
LED KT2, KT3: on, when delayed contacts are energised


Block diagram

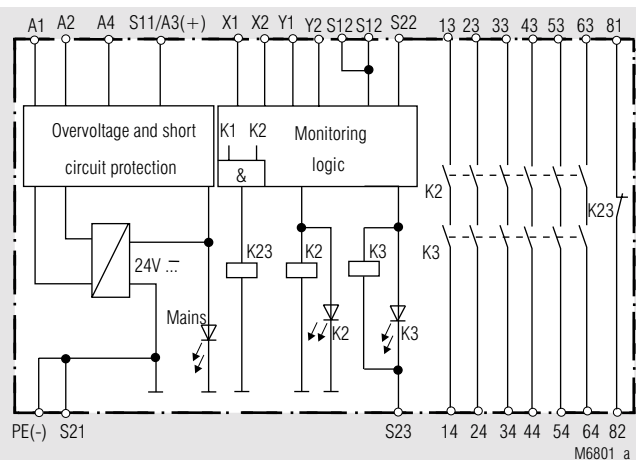


Circuit diagrams

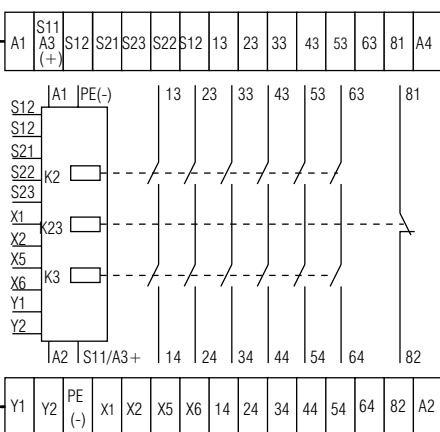

M 7172

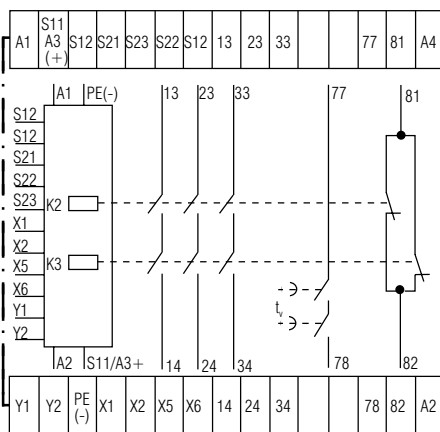

M 7173

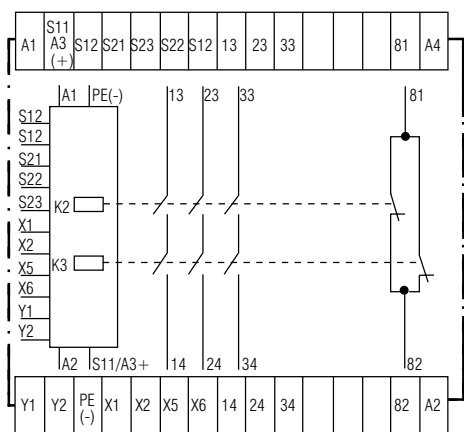



M 7174

BO 5988.61

BO 5988.47

BO 5988.48

Notes		
Jumper assignment for functions: Activation via On pushbutton / or automatic On function		
On push-button Y1 - Y2	Jumper X5 - X6	Function
	.	The output contacts are switches only after operation of the On pushbutton. Line fault monitoring at the On pushbutton
.		Automatic On function for operating voltage Off/On or after emergency stop release

Line fault detection at the On pushbutton:

The output contacts cannot be closed if the On pushbutton is already closed before the voltage is applied to S12, S22 (also in the event of a line fault at the On pushbutton).

A line fault at the On pushbutton which occurs after activation of the device is recognized when swichting-on takes place again and closing of the output contacts is then prevented.

If a line fault occurs at the On pushbutton after the voltage is already present at S12, S22, undesired activation will take place, because this line fault does not differ from the normal closing function.

The gold-plated contacts of the BO 5988 also mean that this module is suitable for switching small loads of 1 mA ... 7 VA, 1 mW ... 7 W in the range 0,1 ... 60 V, 1 ... 300 mA. The contacts also permit the maximum switching current. However, since the gold plating is burnt off at this current level, the device is no longer suitable for switching small loads after this.

The PE terminal permits operation of the device in IT systems with insulation monitoring and also serves as a reference point for testing the control voltage. The internal short-circuit protection will be bridged on DC devices, if the protective ground is connected to terminal PE.

One or more extension modules BN 3081 or external contactors with positively-driven contacts may be used to multiply the number of contacts of the emergency stop module BO 5988.



Technical data	
Input	
Nominal voltage U_N	
BO 5988.--/-00:	DC 24 V
BO 5988.--/-24:	DC 24 V ¹⁾ + AC 24 V ²⁾ DC 24 V ¹⁾ + AC 48 V ²⁾ DC 24 V ¹⁾ + AC 110 V ²⁾ DC 24 V ¹⁾ + AC 230 V ²⁾ DC 24 V ¹⁾ + AC 240 V ²⁾
	¹⁾ at terminals A3-A4 ²⁾ at terminals A1-A2
Voltage range:	AC 0,8 ... 1,1 U_N
at 10 % residual ripple:	DC 0,9 ... 1,2 U_N
at 48 % residual ripple:	DC 0,8 ... 1,1 U_N
Nominal consumption:	AC: approx. 6 VA, DC: approx. 3 W
Nominal frequency:	50 / 60 Hz
Control voltage	
at S11:	typ. DC + 24 V
at S21:	0 V
Control current:	typ. DC 110 mA
Minimum voltage	
at terminals S12, S22:	DC 21 V with activated device
Recovery time:	2 s A minimum switch-off time of 20 s must be observed if the line fault monitoring function at the On pushbutton is active
Output	
Contacts	
BO 5988.48:	3 NO, 1 NC indicator contact
BO 5988.61:	6 NO, 1 NC indicator contact
BO 5988.62:	6 NO, 1 NO indicator contact
BO 5988.47:	3 NO, 1 NC indicator contact 1 NO release delayed
Operate time	
manual restart:	typ. 30 ms
automatic restart:	1 s

Technical data	
Release time	
opening in secondary circuit (S12-S22):	30 ms ± 50 %
opening in supply circuit BO5988.47, BO 5988.48:	100 ms + 50 %
BO 5988.61, BO 5988.62:	50 ms + 50 %
Time delay t_v:	Auxiliary supply is not necessary during elapse of time:
BO 5988.47/1 __:	0,1 ... 1 s 0,3 ... 3 s
BO 5988.47/2 __:	0,5 ... 5 s 1 ... 10 s
	1 s, 3 s, 5 s, 10 s
	Auxiliary supply must be connected during elapse of time:
BO 5988.47/4 __:	0,1 ... 1 s 0,1 ... 1 min
	0,3 ... 3 s 0,3 ... 3 min
	1 ... 10 s 0,5 ... 5 min
	3 ... 30 s 1 ... 10 min
BO 5988.47/5 __:	1 s, 3 s, 10, 30 s
	1 min, 3 min, 5 min, 10 min
Repeat accuracy	
BO 5988.47/1 __ and BO 5988.47/2 __:	± 15 % of setting value
BO 5988.47/4 __ and BO 5988.47/5 __:	± 1 % of setting value
Setting accuracy	
BO 5988.47/1 __ and BO 5988.47/2 __:	upper half of scale: ± 25 % of end scale value lower half of scale: ± 50 % of end scale value
BO 5988.47/4 __ and BO 5988.47/5 __:	+ 7 % of end scale value
Contact type:	Relay, positively-driven
Nominal output voltage:	AC 250 V DC: see limit curve for arc-free operation
Signalling contact of BO 5988.61 and BO 5988.62:	AC 10 ... 250 V, DC 10 ... 120 V for AC/DC 0,1 ... 1 A see total current limit curve (max. 10 A in one contact path)
Thermal current I_{th}:	
release delayed NO contact 77-78 at BO 5988.47:	max. 8 A
Switching capacity	
to AC 15	
NO contact:	5 A / AC 230 V EN 60 947-5-1
NC contact:	2 A / AC 230 V EN 60 947-5-1
BO 5988.47	
release delayed NO contact:	3 A / AC 230V EN 60 947-5-1
Electrical life	
to AC 15 at 2 A, AC 230 V:	10 ⁵ switching cycles EN 60 947-5-1
Permissible operating frequency:	600 switching cycles / h
Short circuit strength	
max. fuse rating:	6 A gL EN 60 947-5-1
max. line circuit breaker:	C 10 A
Mechanical life:	30 x 10 ⁶ switching cycles
General data	
Operating mode:	Continuous operation
Temperature range:	- 15 ... + 50°C
Clearance and creepage distances	
overvoltage category / contamination level:	4 kV / 2 IEC 60 664-1
EMC	
Electrostatic discharge:	8 kV (air) EN 61 000-4-2
HF irradiation:	10 V / m EN 61 000-4-3
Fast transients:	2 kV EN 61 000-4-4
Surge voltages	
between	
wires for power supply:	0,5 kV EN 61 000-4-5
between wire and ground:	2 kV EN 61 000-4-5
HF-wire guided:	10 V EN 61 000-4-6
Interference suppression:	Limit value class B EN 55 011
Degree of protection:	Housing: IP 40 EN 60 529
	Terminals: IP 20 EN 60 529


Technical data	
Housing:	Thermoplastic with V0 behaviour according to UL subject 94
Vibration resistance:	Amplitude 0,35 mm EN 60 068-2-6 frequency 10 ... 55 Hz
Climate resistance:	15 / 050 / 04 EN 60 068-1
Terminal designation:	EN 50 005
Wire connection:	1 x 4 mm ² solid or 1 x 2,5 mm ² stranded ferruled (isolated) or 2 x 1,5 mm ² stranded ferruled (isolated) DIN 46 228-1/-2/-3/-4 or 2 x 2,5 mm ² stranded ferruled DIN 46 228-1/-2/-3
Wire fixing:	Plus-minus terminal screws M 3,5 box terminal with wire protection
Mounting:	DIN rail EN 50 022
Weight:	850 g
Dimensions	
Width x height x depth:	100 x 74 x 121 mm

Standard types	
BO 5988.61/024 DC 24 V + AC 230 V 50 / 60 Hz	
Article number: 0040375	stock item
<ul style="list-style-type: none"> • Dual voltage version • Output: 6 NO contacts, 1 NC contact as monitoring contact • Width: 100 mm 	
BO 5988.47/124 DC 24 V + AC 230 V 50 / 60 Hz 1 ... 10 s	
Article number: 0040430	stock item
<ul style="list-style-type: none"> • Dual voltage version • Output: 3 NO contacts, 1 NC contact as monitoring contact, 1 release delayed NO contact • With adjustable time delay t_v to 10 min. • Width: 100 mm 	

Variants	
BO 5988. __ / 60:	with CSA approval
BO 5988. __ / 61:	with UL approval (Canada/USA)
Auxiliary supply is not necessary during elapse of time:	
BO 5988.47 / 1 __:	3 NO / 1 NC contacts + t_v adjustable
BO 5988.47 / 2 __:	3 NO / 1 NC contacts + t_v fixed
Auxiliary supply must be connected during elapse of time:	
BO 5988.47 / 4 __:	3 NO / 1 NC contacts + t_v adjustable
BO 5988.47 / 5 __:	3 NO / 1 NC contacts + t_v fixed
Without time delay t_v :	
BO 5988.48 / 0 __:	3 NO / 1 NC contacts
BO 5988.61 / 0 __:	6 NO / 1 NC contacts as monitoring contact
BO 5988.62 / 0 __:	6 NO / 1 NC contacts as monitoring contact
BO 5988. __ / 00:	single voltage model
BO 5988. __ / 24:	dual voltage model
BO 5988.61 / 106:	
Protective separation of control and load circuits according to VDE 0106 part 101 4 kV / 2 referred to overvoltage category II with basic insulation to VDE 0110 of 2,5 kV / 2.	
BO 5988.61 / 324:	Dual voltage model 0,5 s operate delay with automatic restart

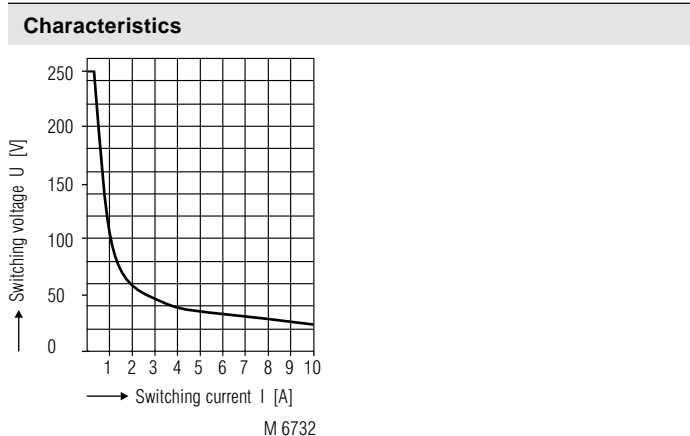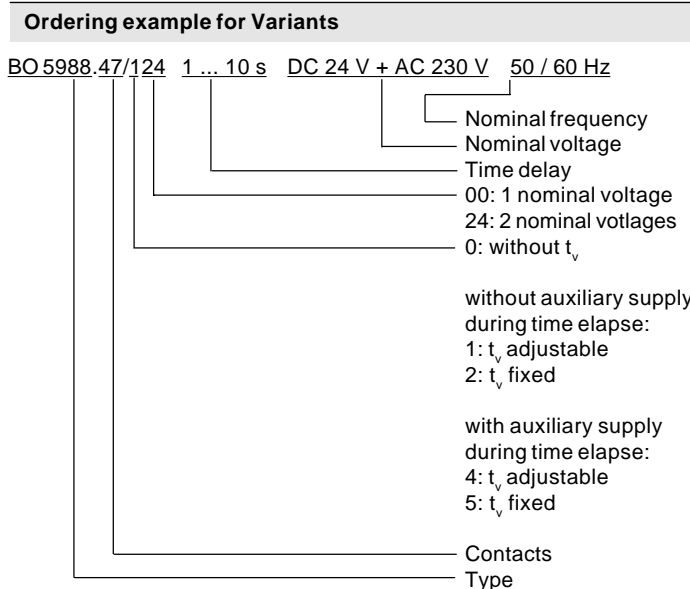

Limit curve for arc-free operation with resistive load

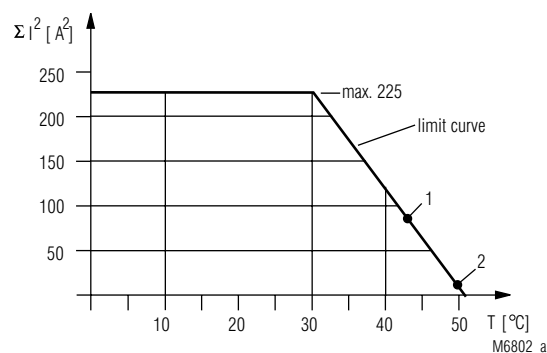

Total current limit curve

It is necessary to use the square of the currents in order to obtain a linear limit curve.

General formula for determination of the maximum ambient temperature

- A) Sum of currents² per safety contact = value on scale $\Sigma I^2 (A^2)$
 B) Max. ambient temperature T = Cross point of scale $\Sigma I^2 (A^2)$ with limit curve

Example 1

- A) $(4A)^2 + (4A)^2 + (4A)^2 + (4A)^2 + (4A)^2 + (4A)^2 = 96 A^2$ (Scale ΣI^2)
 B) Max. ambient temperature T = 43°C (point 1)

Example 2


- A) $(0,5 A)^2 + (1 A)^2 + (2 A)^2 + (1 A)^2 = 6,25 A^2$ (Scale ΣI^2)
 B) Max. ambient temperature T = 49°C (point 2)

Please note:

The total current² can still be 1,5 A² at 50°C, i.e. 0,5 A per safety contact


- A) $(0,5 A)^2 + (0,5 A)^2 + (0,5 A)^2 + (0,5 A)^2 + (0,5 A)^2 + (0,5 A)^2 = 1,5 A^2$
 B) Max. ambient temperature = 50°C

Application examples

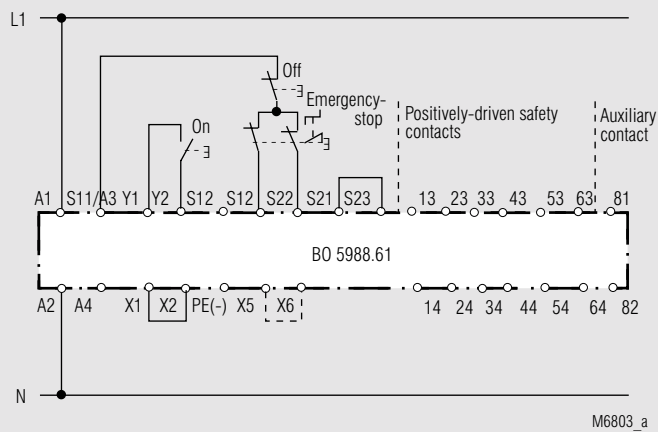


Two-channel emergency stop circuit without cross fault detection.
Activation via On pushbutton. - - - Jumper X5 - X6:
A jumper must be fitted X5 - X6 for the automatic On function.
The On pushbutton is not required.

Application examples

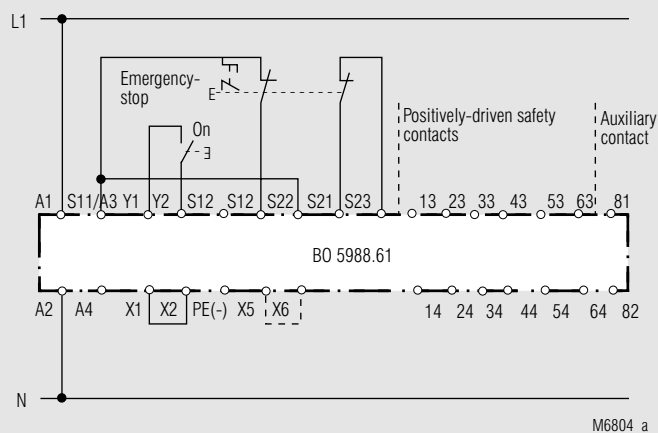


Two-channel emergency-stop circuit with cross fault detection.
Activation via On pushbutton. - - - Jumper X5 - X6:
A jumper must be fitted X5 - X6 for the automatic On function.
The On pushbutton is not required.

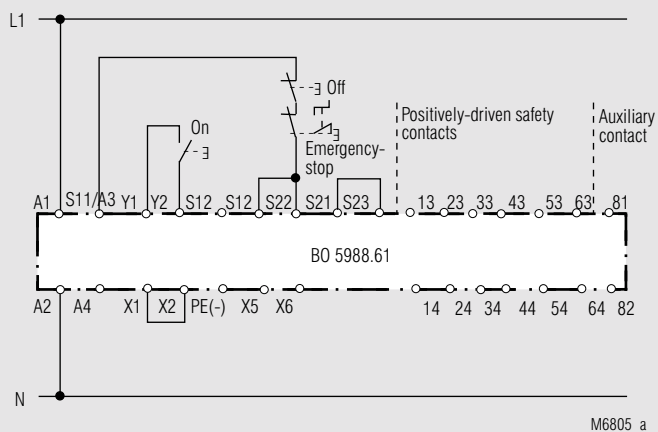

One-channel emergency stop circuit. This circuit does not have any redundancy in the emergency stop control device circuit.

Application examples

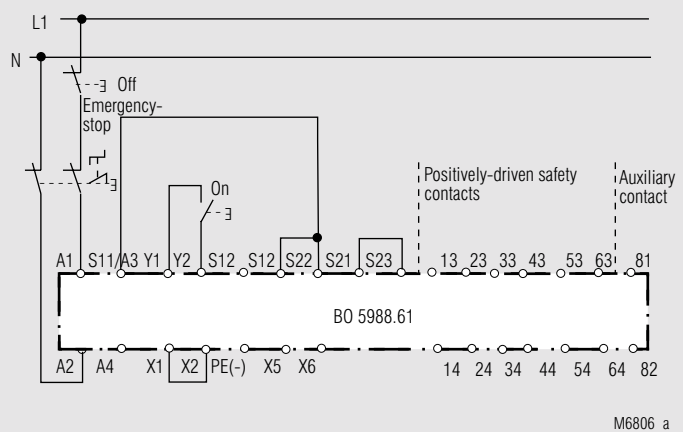


Two-pole emergency stop circuit with emergency stop control device in the supply circuit.

Application for long emergency stop loops where the control voltage drops below the minimum voltage of 21 V.


Attention:

Single faults (e.g. line faults at the emergency stop control device) are not detected with this external circuit configuration.

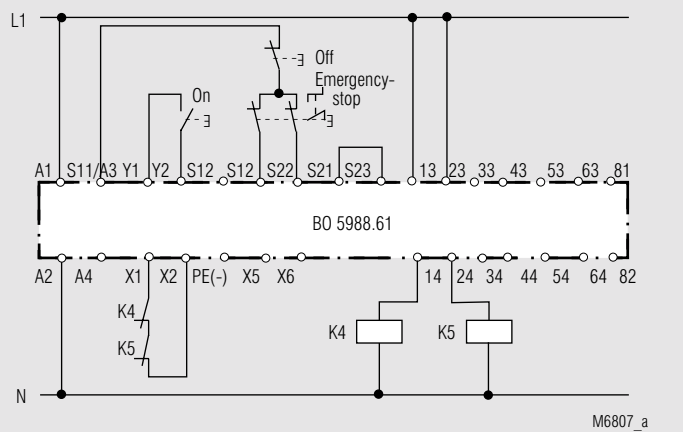


Contact reinforcement by external contactors, two-channel.

The output contacts can be reinforced by external contactors with positively-driven contacts for switching currents > 8 A. Functioning of the external contactors is monitored by looping the NC contacts into the closing circuit (terminals X1 - X2).

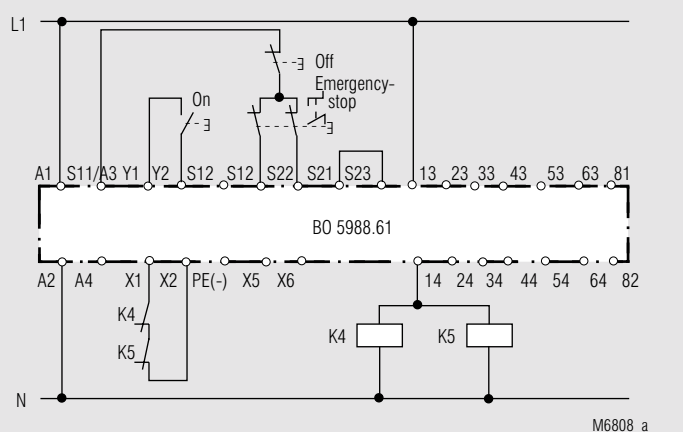

Contact reinforcement by external contactors with reduced safety level.

Application examples

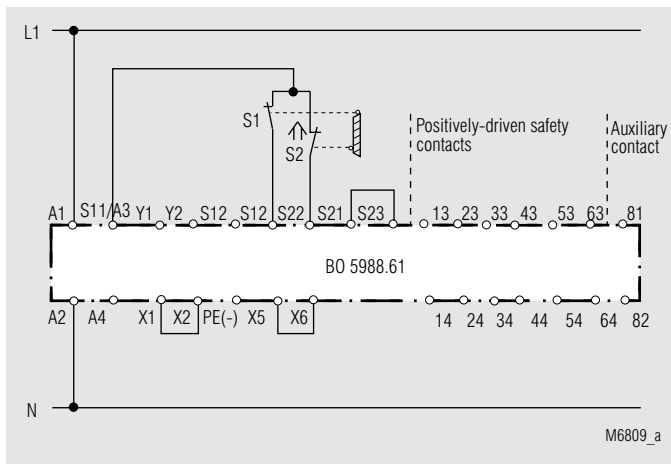

Two-channel monitoring of a safety gate. S1 must not close before S2